

HY10

COMPACT AND POWERFUL





ENGINE KOOP KD192 FA / Briggs&Stratton XR2100

Small excavators are very suitable for farm orchard and small construction site and rural families.
Application scenarios include farm trenching, aqua toilet renovation, vegetable greenhouse trenching, green belt repair, etc.



HY10 Mini Excavator-All You Need for Work in Tight Spaces.

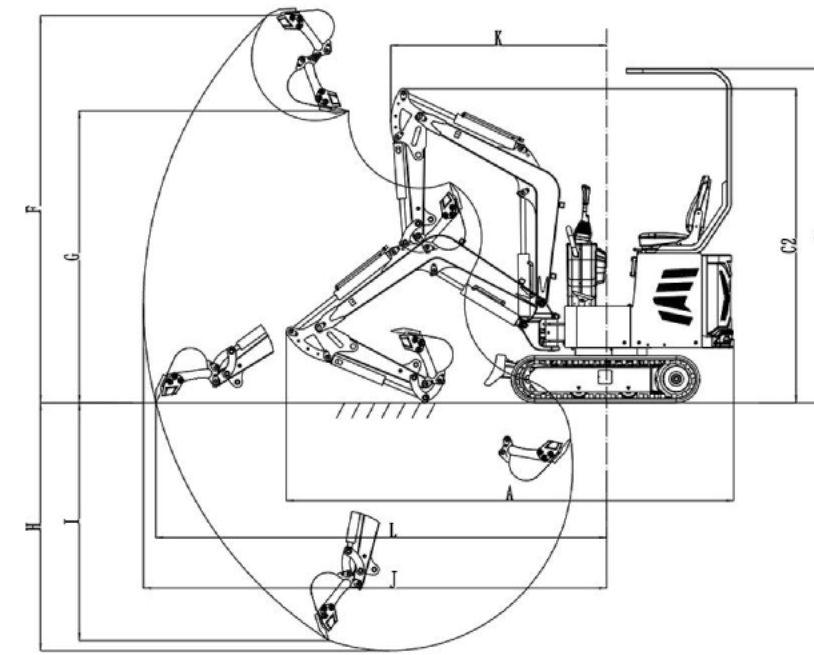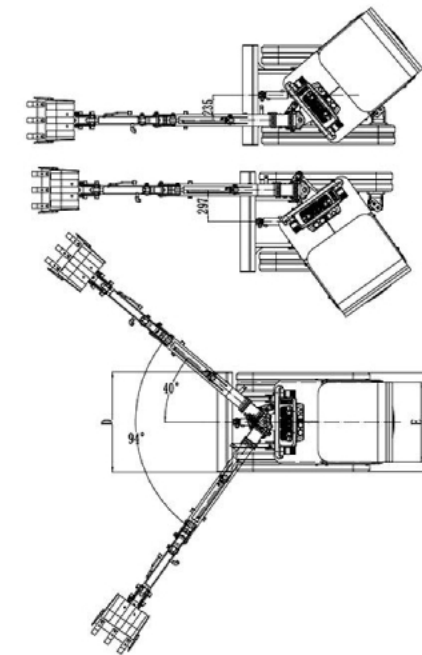

Code	Standard
A	2870 mm
B	835 mm
C	2213(1990) mm
D	937 mm
E	746 mm
F	2490 mm
G	1745 mm
H	1725 mm
I	1655 mm
J	3030 mm
K	1490 mm
L	2940 mm

Performance Parameters

Overall Size

Total Length (Transport Time)	2870mm
Total Width (Transportation/Operation)	930mm
Total Height(With/Without Ceiling)	2213(1990)mm
Bulldozer Blade Width	937mm
Bulldozer Blade Height	210mm
Caterpillar Band Center Distance	746mm
Standard Caterpillar Band Board Width	180mm
Platform Clearance	405mm
Standard Bucket Width	380/330mm
Total Length of Caterpillar Band	1200mm

Scope of Work

Maximum Excavation Height	2490mm
Maximum Unloading Height	1745mm
Maximum Excavation Depth	1725mm
Maximum Vertical Arm Exeavation Depth	1655mm
Maximum Exeavation Distance	3030mm
Minimum Turning Radius At Front End	1490mm
Maximum Excavation Ground Distance	2940mm
Maximum Bulldozing Height	170mm
Maximum Bulldozing Depth	240mm

Basic Specifications

Operating Weight	1000kg
Bucket Capacity	0.022m³
Working Device Form	Backhoe

Engine

Model	KOOP/ Briggs&Stratton
Delivery Capacity	499/420 CC
Rated Output Power/Speed	7.6 / 9.9 kW

Speed

Maximum Travel Speed	1.2 km/h
Slewing Speed	9 rpm
Maximum Climbing Ability	30°
Maximum Digging Force	6.5 kN

Size

Total Length (Transportation)	2870mm
Total Width	930mm
Total Height(With/Withoutceiling)	2285(2030)mm
Bulldozer Maximum Cleaning Depth	240mm
Bulldozer Maximum Ground Clearanceheight	170mm



DIGGER WORLD

For additional information and pricing, please visit:

WWW.DIGGER-WORLD.COM