

HY30

COMPACT AND POWERFUL




ENGINE Kubota D1105

Whether you're looking for exceptional value or leading innovation, there's a compact excavator that's right for you. Each model delivers impressive digging power, depth and reach, with smooth and precise controls that make it easy to deploy its leading performance and attachment versatility.



HY30 Mini Excavator-All You Need for Work in Tight Spaces.

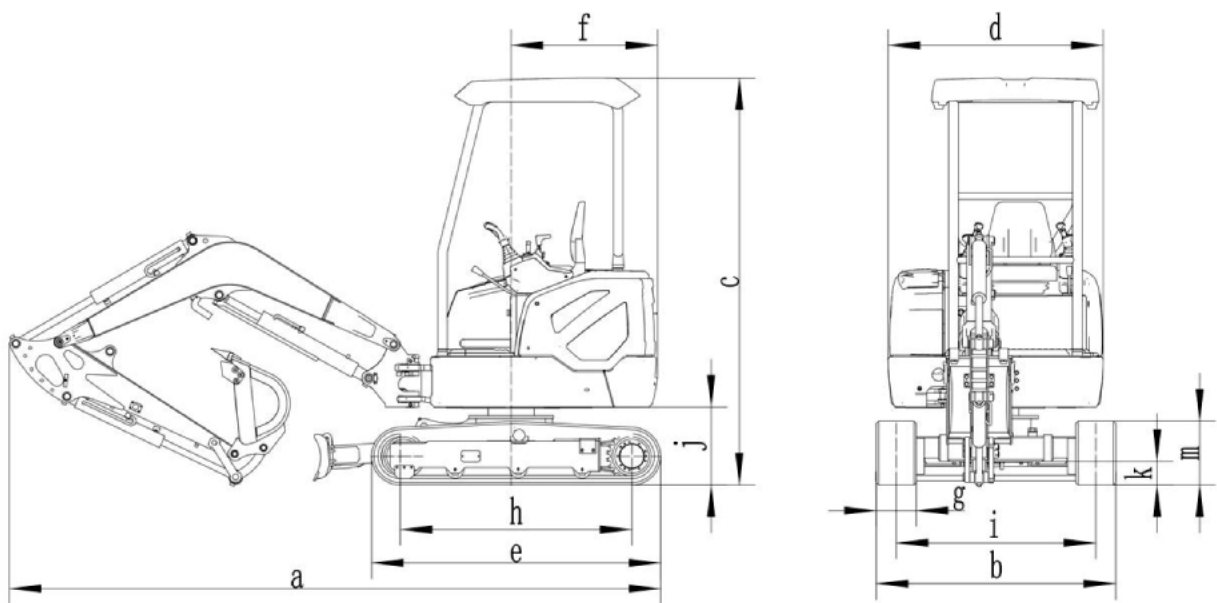

Code	Standard
a	3930mm
b	1300/1500mm
c	2550mm
d	1350mm
e	1800mm
f	900mm
g	250mm
h	1450mm
i	1050/1250mm
j	490mm
k	150mm
m	400mm

Performance Parameters

Operating Weight	3000KG
Bucket Capacity	0.06m³

Engine

Model	KubotaD1105
Rated Output Power	15.6 kW
Maximum Torque/Speed	70.3N.m/(1600r/min)

Working Range

Maximum Digging Height	3950mm
Maximum Dumping Height	2800mm
Maximum Digging Depth	2260mm
Maximum Vertical Wall Digging Depth	1820mm
Maximum Digging Radius	4230mm
Minimum Swing Radius	1855mm
Maximum Dozer Lifting Height	200mm
Maximum Dozer Cutting Depth	300mm

Oil Capacity

Fuel Tank Capacity	35L
Hydraulic Tank Capacity	32L
Engine Oil Capacity	5.1L

Size

Overall Length	3930mm
Overall Width	1300/1500mm
Overall Height	2550mm
Width Of Platform	1350mm
Length Of Crawler	1800mm
Minimum Tail Swing Radius	900mm
Width Of Crawler	250mm
Track Gauge	1450mm
Track Gauge	1050/1250mm
Counterweight Clearance	490mm
Minimum Ground Clearance	150mm
Track Height	400mm
Boom Deflection Distance (Right)	58°/520
Boom Deflection Distance (Left)	70°/580

Speed

Travel Speed	3.1/2 km/h
Slewing Speed	8 r/min
Maximum Climbing Ability	≤30°
Maximum Tractive Force	28KN



DIGGER WORLD

For additional information and pricing, please visit:

WWW.DIGGER-WORLD.COM