


# LT-25



Independent Boom Swing as standard, allowing boom side movement without repositioning the excavator.



Expanding tracks and housed track motors as standard. Expanding tracks allows retraction for manouvreing in small areas, and expanding for greater stability.

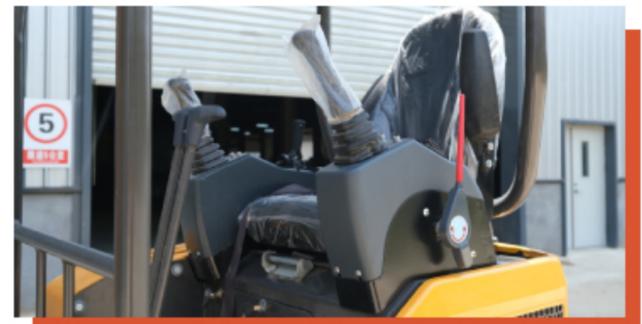

High & low speed travel modes as standard, and hydraulic side piloting for smooth operation and delicate control.



Equipped with a load sensitive hydraulic system for precise control and distribution of hydraulic power.



Rubber tracks are standard but steel tracks are available as an optional extra.



Kubota D1105 is a vertical, water-cooled, four cycle diesel engine with a capacity of 25HP at 3000RPM.


## Specifications

Model	LT-25
Operating Weight	2500 kg
Engine Model	Kubota D1105-E4B
Engine Displacement	1.123 L
Cooling	Water Cooled
Cylinders	4
Rated Power	25HP
Hydraulic Pump	Piston
Hydraulic Flow Rate	55 L/min

Bucket Capacity	0.07 m <sup>3</sup>
Max Digging Force	18 kN
Swing Speed	9 rpm
Traveling Speed	2.8 km/h
Gradeability	35°

Max Digging Reach	4040 mm
Max Digging Depth	2400 mm
Max Digging Height	3570 mm
Max Dumping Height	2440 mm
Min Swing Radius	1610 mm
Max Dozer Blade Lift	240 mm
Max Dozer Blade Lowering	270 mm

Overall Length	3555 mm
Overall Width	990 mm
Overall Height	2290 mm
Ground Clearance	150 mm
Track Length	1610 mm
Undercarriage Width	990-1300 mm
Track Ground Contact Length	1230 mm
Tail Swing Radius	1610 mm

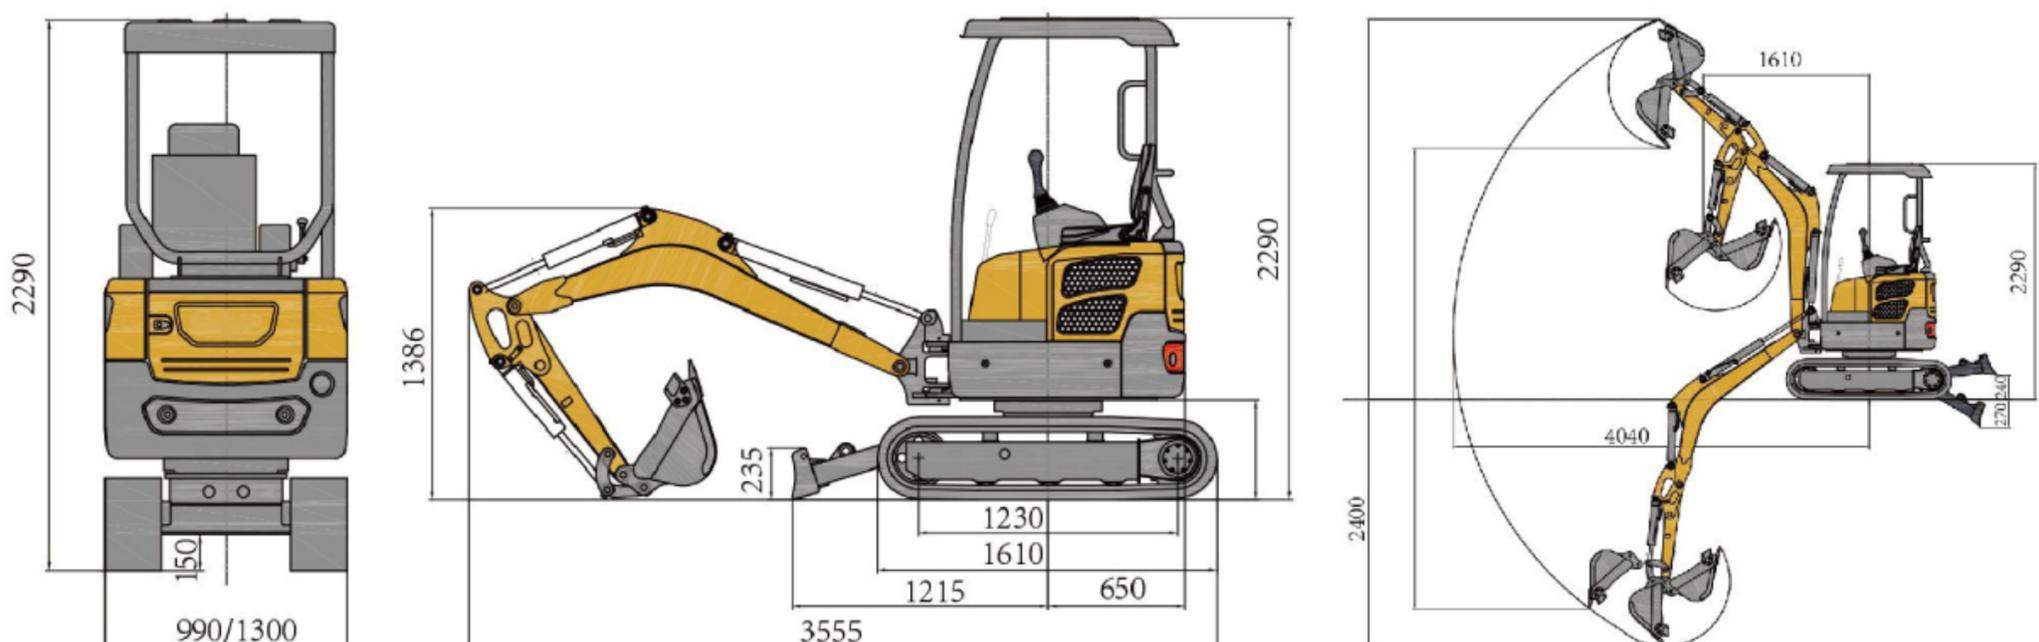

## Excavator Attachments



Auger Drill



Hydraulic Quick Hitch



Breaking Hammer



Ripper



Excavator Rake



Wood Grapple



Levelling Bucket



Tilting Bucket



Machinical Quick Hitch



Holding Grab



Thumb



Narrow Bucket