


# LT-30



Precise and responsive hydraulic side piloting for commercial operation.

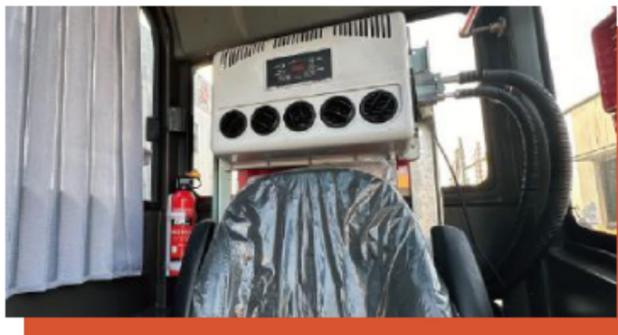

Soundproofed cab with air conditioning as standard, for comfortable operation.



Fully automated production welding ensures precise weld seams for strong load bearing capacity and consistent product quality.



Equipped with a load sensitive hydraulic system for precise control and distribution of hydraulic power.



Durable rubber tracks as standard for smooth travel and operation. Steel tracks are optional.



Kubota D1105 is a vertical, water-cooled, four cycle diesel engine with a capacity of 25HP at 3000RPM.




## Specifications

Model	LT-30
Operating Weight	3000 kg
Engine Model	Kubota D1105-E4B
Engine Displacement	1.123 L
Cooling	Water Cooled
Cylinders	4
Rated Power	25HP
Hydraulic Pump	Piston
Hydraulic Flow Rate	55 L/min

Bucket Capacity	0.1 m <sup>3</sup>
Max Digging Force	23.5 kN
Swing Speed	10 rpm
Traveling Speed	2.8 km/h
Gradeability	35°

Max Digging Reach	4835 mm
Max Digging Depth	2830 mm
Max Digging Height	4427 mm
Max Dumping Height	3005 mm
Min Swing Radius	2160 mm
Max Dozer Blade Lift	308 mm
Max Dozer Blade Lowering	360 mm

Overall Length	4195 mm
Overall Width	1550 mm
Overall Height	2480 mm
Ground Clearance	285 mm
Track Length	1990 mm
Undercarriage Width	1550 mm
Track Ground Contact Length	1560 mm
Tail Swing Radius	860 mm

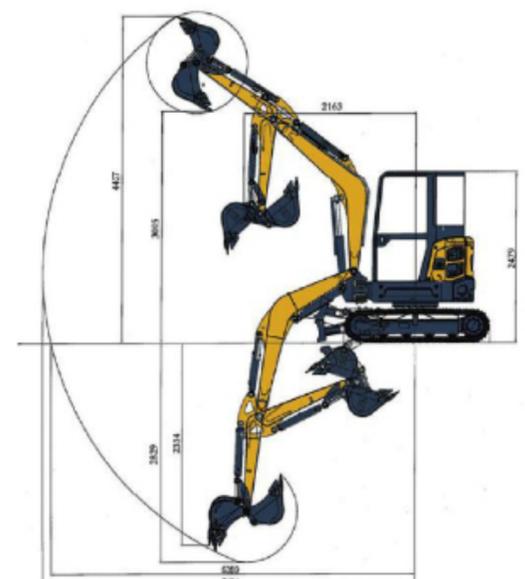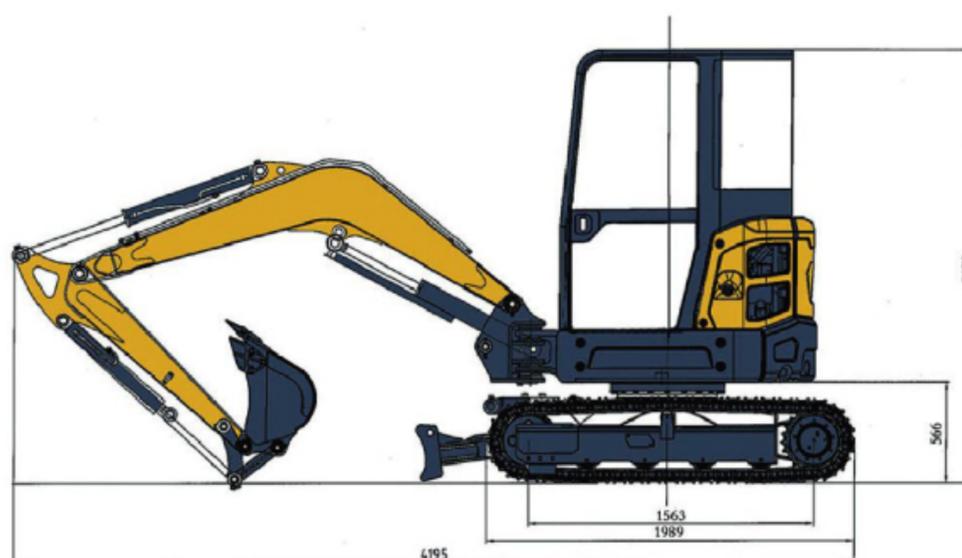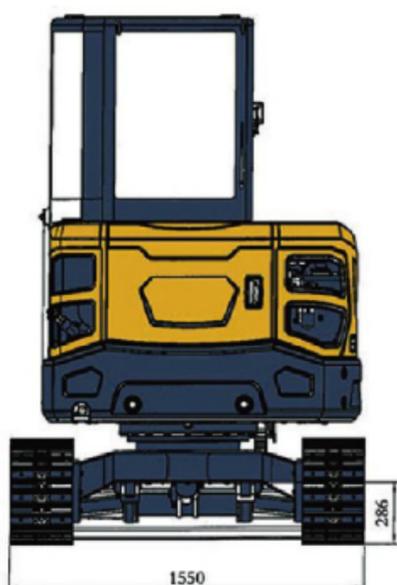

## Excavator Attachments



Auger Drill



Hydraulic Quick Hitch



Breaking Hammer



Ripper



Excavator Rake



Wood Grapple



Levelling Bucket



Tilting Bucket



Machinical Quick Hitch



Holding Grab



Thumb



Narrow Bucket