


# LT-35




High & low speed travel modes, for navigating greater distances more effectively.

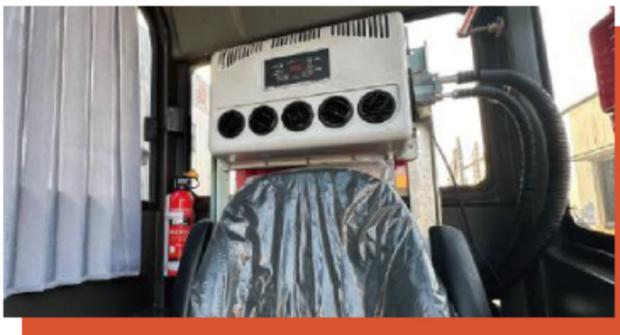

Soundproofed cab with air conditioning as standard, for comfortable operation.



Fully automated production welding ensures precise weld seams for strong load bearing capacity and consistent product quality.

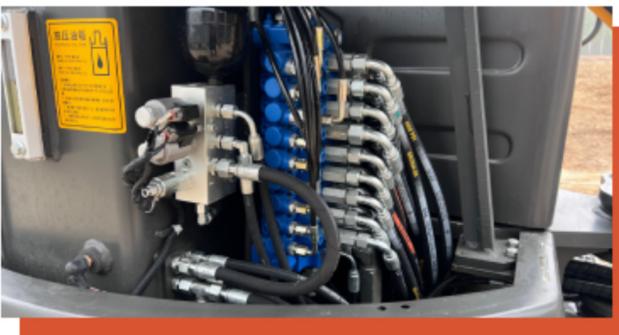

Equipped with a load sensitive hydraulic system for precise control and distribution of hydraulic power.





Heavy duty steel tracks and securely housed track motors as standard, for rough terrain.



Kubota D1703 is a vertical, water-cooled, four cycle diesel engine with a capacity of 34HP at 3000RPM.

# Specifications

Model	LT-35
Operating Weight	3500 kg
Engine Model	Kubota D1703
Engine Displacement	1.647 L
Cooling	Water Cooled
Cylinders	4
Rated Power	34HP
Hydraulic Pump	Piston
Hydraulic Flow Rate	88 L/min
Bucket Capacity	0.12 m <sup>3</sup>
Max Digging Force	30 kN
Swing Speed	11 rpm
Traveling Speed	2.8 / 4.4 kph
Gradeability	35°
Max Digging Reach	5480 mm
Max Digging Depth	3208 mm
Max Digging Height	4540 mm
Max Dumping Height	3280 mm
Min Swing Radius	2530 mm
Max Dozer Blade Lift	308 mm
Max Dozer Blade Lowering	360 mm
Overall Length	4915 mm
Overall Width	1755 mm
Overall Height	2525 mm
Ground Clearance	295 mm
Track Length	2125 mm
Undercarriage Width	1755 mm
Track Ground Contact Length	1670 mm
Tail Swing Radius	870 mm

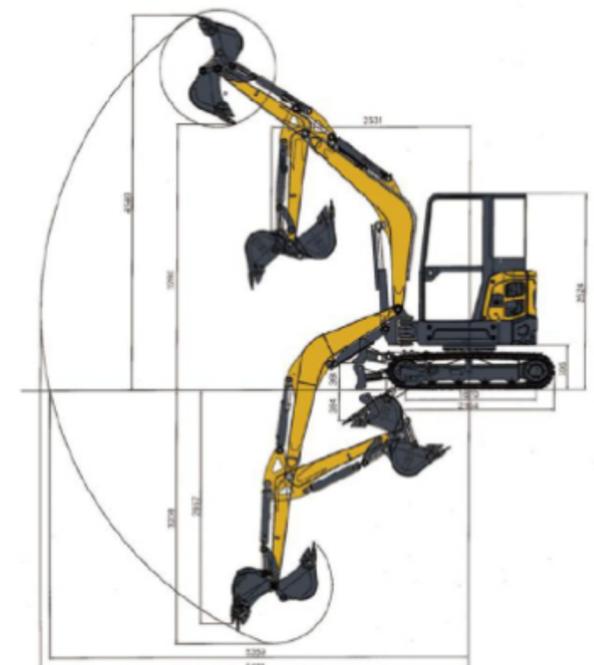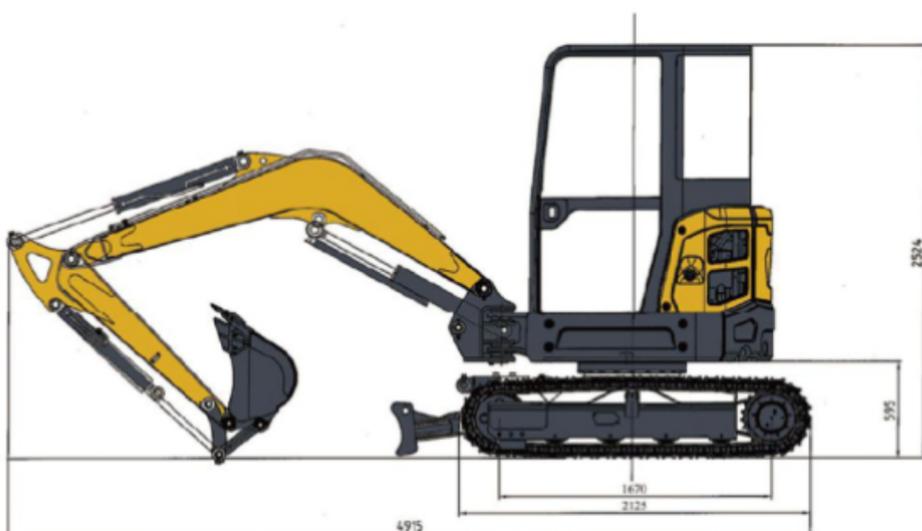

## Excavator Attachments



Auger Drill



Hydraulic Quick Hitch



Breaking Hammer



Ripper



Excavator Rake



Wood Grapple



Levelling Bucket



Tilting Bucket



Machinical Quick Hitch



Holding Grab



Thumb



Narrow Bucket