

LT-60



Extra machine width for additional stability during operation and easier engine access.



Soundproofed cab with air conditioning as standard, for comfortable operation.



Fully automated production welding ensures precise weld seams for strong load bearing capacity and consistent product quality.



Load-sensitive hydraulic systems for precise control and distribution of hydraulic power.



Steel tracks as standard for maximum wear resistance and longer working life. Rubber tracks are optional.



Yanmar 4TNV84 engine fitted as standard, a 3-litre 4-cylinder water-cooled diesel engine delivering 67HP.


Specifications

Model	LT-60
Operating Weight	6000 kg
Engine Model	Yanmar 4TNV94L
Engine Displacement	3.053 L
Cooling	Water Cooled
Cylinders	4
Rated Power	36.2 kW
Hydraulic Pump	Piston Pump
Hydraulic Flow Rate	139 L/min

Bucket Capacity	0.21 m ³
Max Digging Force	48 kN
Swing Speed	11 rpm
Traveling Speed	2.5~4.2 km/h
Gradeability	35°

Max Digging Reach	5898 mm
Max Digging Depth	3860 mm
Max Digging Height	5770 mm
Max Dumping Height	4075 mm
Min Swing Radius	2140 mm
Min Height at Min Swing Radius	4430 mm
Max Vertical Wall Digging Depth	3060 mm

Overall Length	5550 mm
Overall Width	1960 mm
Overall Height	2420 mm
Ground Clearance	332 mm
Track Length	2600 mm
Track Gauge	1560 mm
Track Ground Length	2020 mm
Swing Radius at Tail	1520 mm

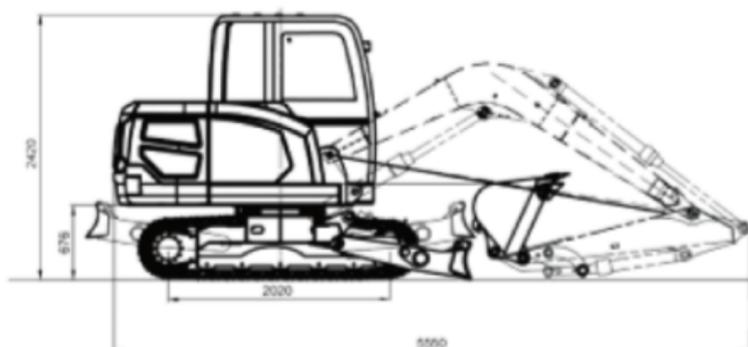

Excavator Attachments



Auger Drill



Hydraulic Quick Hitch



Breaking Hammer



Narrow Bucket



Ripper



Excavator Rake



Wood Grapple



Mechanical Grapple



Levelling Bucket



Tilting Bucket



Machinical Quick Hitch



Orange Peel Grapple



Crushing Forceps



Shell Shape Grapple



Hydraulic Power Shear



Holding Grab



Thumb



Steel Grapple