



**XT10K**  
COMPACT FLEXIBLE  
POWERFUL DYNAMICS



**Mechanical control lever**

It mainly includes key components such as left and right operation handles, walking pedals, various switches, and instrument panels.



● The newly upgraded oil cylinder is above the boom to prevent the oil cylinder from being bumped during work, the hidden oil pipe design makes the appearance neat and beautiful.


● Both the oil pipe protective cover and the oil cylinder protective plate are made of high-strength cast steel.



Canopy


Anti-tipping frame

**Optional**

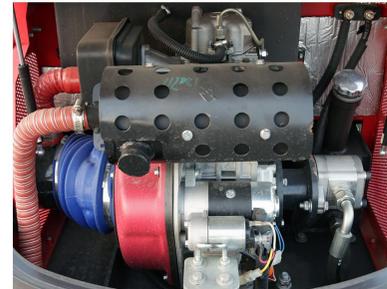

**Tail can be opened**

1. Convenient inspection and maintenance
2. Three cast iron counterweights to ensure balance during work

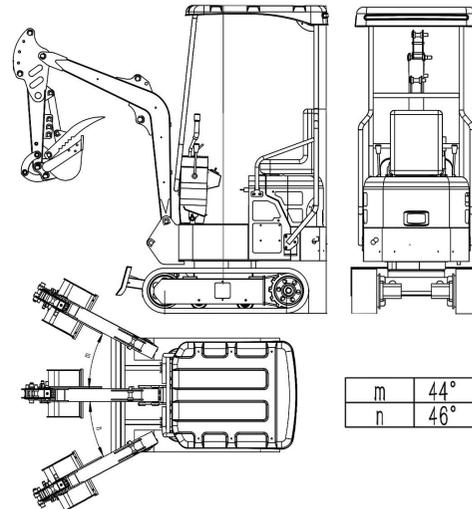

m	44°
n	46°

## Specifications:

Model	XT10K
Operating weight	980
Bucket capacity	0.025
Engine model	KOOP192
Rated power (kw/r/min)	7KW/3000rpm
Hydraulic pump model	CBTG-F308-AL
Max. flow (L/min)	24
Working pressure (Mpa)	12.2
Control valve model	CDB15-90T
Swing motor model	RMR-315
Travel motor model	6K310/4K310
Fuel tank capacity (L)	7.6
Hydraulic oil tank capacity (L)	15
Travel speed (km/h)	2.5
Swing speed (r/min)	9
Max. climbing degree (%)	30
A-Overall length (mm)	2240
B-Overall width (mm)	950
C-Overall height (to top of boom) (mm)	2150
D-Overall height (to top of cab) (mm)	2260
E-Counterweight ground clearance (mm)	373
F-Min. ground clearance (mm)	110
G-Tail swing radius (mm)	550
H-Track ground length (mm)	950
J-Track length (mm)	1210
K-Track gauge (mm)	560
L-Track width (mm)	930
M-Track shoe width (mm)	180
N-Turntable width (mm)	760
O-Max. digging height (mm)	2260
P-Max. dumping height (mm)	1600
Q-Max. digging height (mm)	1600
R-Max. vertical wall digging depth (mm)	1460
T-Max. digging reach (mm)	2300
U-Max. digging reach at ground level (mm)	2300
V-Min. swing radius (mm)	1600
X-Distance between center of rotation and tail length (mm)	737
Deflection angle left' /right°	46/44