




**XT12K**  
COMPACT FLEXIBLE  
POWERFUL DYNAMICS




**Swing boom**

Optional boom swing  
Optional boom side swing function, cast iron side swing head, beautiful and durable

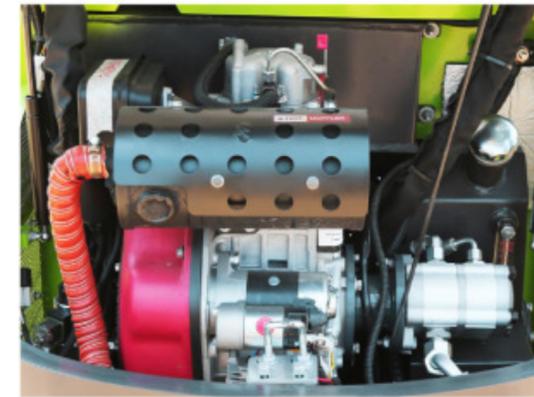

**Tail can be opened**

1. Convenient inspection and maintenance
2. Three cast iron counterweights to ensure balance during work

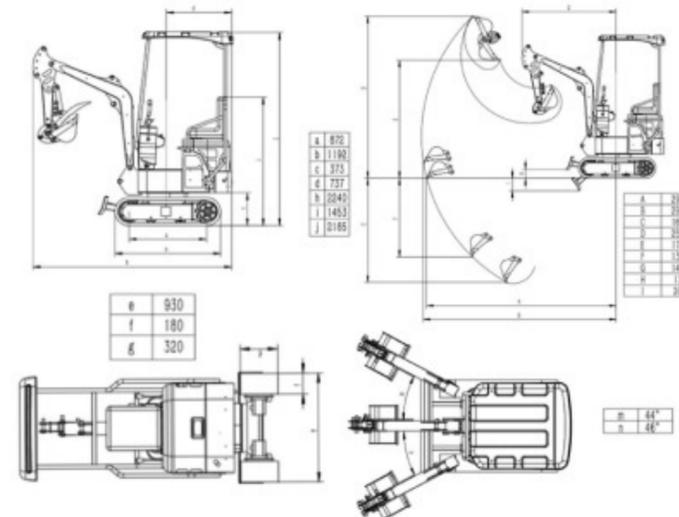

**Hydraulic pilot operation**

Hydraulic safety lock to ensure safe operation  
Large tilt angle makes it easier to get on and off the vehicle



- The newly upgraded oil cylinder is above the boom to prevent the oil cylinder from being bumped during work, the hidden oil pipe design makes the appearance neat and beautiful.
- Bucket, bucket arm, cylinder guard plate and bottom plate are all made of high-strength cast steel.



**Walking motor**

Stable driving and strong power



**Specifications:**

Model	XT12K
Operating weight	1180kg
Bucket capacity	0.025m <sup>3</sup>
Engine model	Koop 192
Engine power	7KW/3000rpm
Displacement (L)	0.499
Pump type	CTX63815S20R
Max. flow (L/min)	27L/min
Working pressure (Mpa)	13.6MPa
Swing motor model	RMR-315
Travel motor model	4K310
Fuel tank capacity (L)	7.6L
Hydraulic oil tank capacity (L)	15L
Travel speed (km/h)	0-2.5km/h
Swing speed (r/min)	10rpm
Max. climbing degree (%)	30°
a Wheel base	930mm
b Track length	1210mm
c Upper chassis ground clearance	373mm
d Counter weight turning radius	700mm
e Chassis width	950mm
f Track width	180mm
g Track height	280mm
h Transportation length	2400mm
j Total height	2300mm
Max. digging radius	2800mm
Max. digging depth	1800mm
Max. digging height	2550mm
Max. dumping height	1900mm
Maximum vertical digging depth	1720mm
Minimum turning radius	1680mm
Maximum Lift Of Dozer blade	260mm
Maximum depth Of Dozer blade	260mm
Hydraulic manifold valve	BF06-08
Crawler tension device	Butter oil cylinder
Ground pressure kPa	10.5