



**LANDWARD**

LEADING LIFE FORWARD

**XT-15**

**1500kg  
Mini Excavator**



**Wide Range of Buckets  
& Attachments**




**Optional Independent  
Boom Swing**



**Easy Hydraulic  
Line Connections**



**Hydraulic Side  
Piloting Controls**

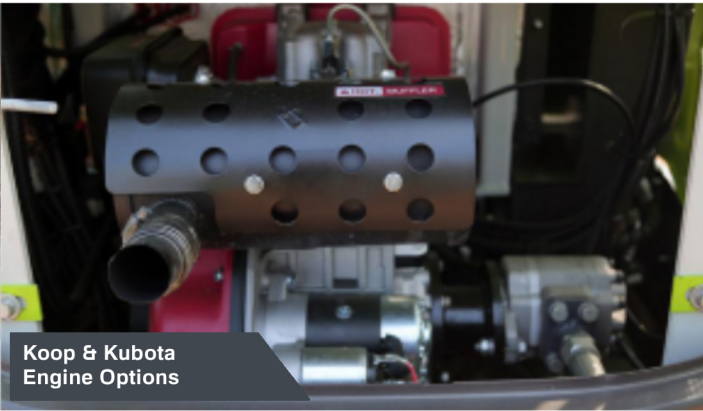

**Koop & Kubota  
Engine Options**



**Optional Adjustable  
Track Width**

# Specifications

|                                    |                        |
|------------------------------------|------------------------|
| Operating Weight                   | 1480 kg                |
| Bucket Capacity                    | 0.025 m³               |
| Engine Model                       | Koop 192 / Kubota D722 |
| Engine Cylinders                   | 1 / 3 Cyl              |
| Engine Power                       | 11 / 18 HP             |
| Engine Cooling                     | Air / Water            |
| Hydraulic Pump Model               | CTX63815S20R           |
| Hydraulic Flow                     | 27 L/min               |
| Working Pressure                   | 13.6 MPa               |
| Control Valve Model                | DL80-D10L-8T           |
| Swing Motor Model                  | RMR-315                |
| Travel Motor Model                 | 6K310 / 4K310          |
| Fuel Tank Capacity                 | 5 L                    |
| Hydraulic Oil Tank Capacity        | 17 L                   |
| Travel Speed                       | 2.5 km/h               |
| Swing Speed                        | 9 rpm                  |
| Max. Climbing Grade                | 30%                    |
| Boom Deflection Angle (Left/Right) | 46° / 44°              |

|                                                         |              |
|---------------------------------------------------------|--------------|
| A - Overall Length                                      | 2320 mm      |
| B - Overall Width                                       | 950 mm       |
| C - Overall Height (to top of boom)                     | 2200 mm      |
| E - Counterweight Ground Clearance                      | 406 mm       |
| F - Min. Ground Clearance                               | 110 mm       |
| G - Tail Swing Radius                                   | 600 mm       |
| H - Track Ground Length                                 | 950 mm       |
| J - Track Length                                        | 1210 mm      |
| K - Track Gauge                                         | 560 mm       |
| L - Track Width                                         |              |
| - Fixed Track Variant                                   | 950mm        |
| - Adjustable Tracks Variant                             | 950 - 1200mm |
| M - Track Shoe Width                                    | 180 mm       |
| N - Turntable Width                                     | 880 mm       |
| O - Max. Digging Height                                 | 2650 mm      |
| P - Max. Dumping Height                                 | 1900 mm      |
| Q - Max. Digging Depth                                  | 1730 mm      |
| R - Max. Vertical Wall Digging Depth                    | 1620 mm      |
| T - Max. Digging Reach                                  | 2350 mm      |
| U - Max. Digging Reach at Ground Level                  | 2350 mm      |
| V - Min. Swing Radius                                   | 1610 mm      |
| X - Distance Between Centre of Rotation and Tail Length | 790 mm       |

