



LANDWARD

LEADING LIFE FORWARD

XT20

RELIABLE QUALITY
POWERFUL DYNAMICS



Securely Housed
Track Motors



Optional Independent
Boom Swing




Easy Hydraulic
Line Connections




Hydraulic Side
Piloting Controls



Easy Rear Engine
Access & Maintenance

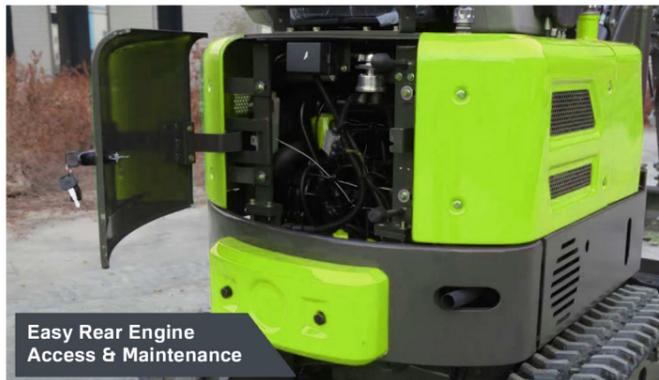


Securely Housed
Track Motors

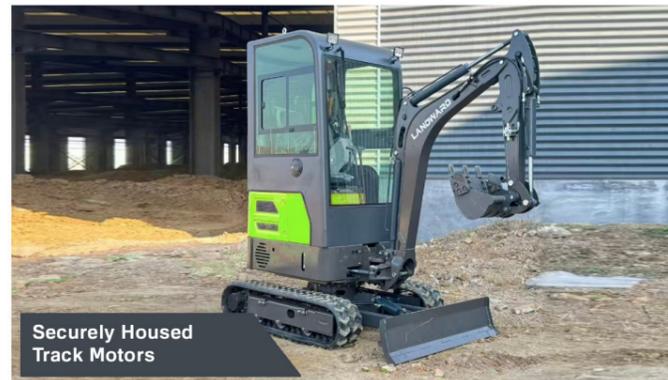

Specifications

	XT-20	XT-20	XT-20 PRO
Engine	Laidong KM385	Kubota D902	Kubota D902
Rated Power	25HP	20HP	20HP
Engine Cylinders	3	3	3
Cooling	Water-Cooled	Water-Cooled	Water-Cooled
Fuel Type	Diesel	Diesel	Diesel
Fuel Tank Capacity	9.5L	9.5L	9.5L
Hydraulic Pump	XZZ Hydraulics	XZZ Hydraulics	XZZ Hydraulics
Hydraulic Pump Type	Gear Pump	Gear Pump	Piston Pump
Hydraulic Flow Rate	28 L/min	28 L/min	41.4 L/min
Working Pressure	20Mpa	20Mpa	20Mpa
Brand Of Travel Motor	REEWO	REEWO	REEWO
Travel Speed	2.2 kph	2.2 kph	2.2 - 4.3 kph
Operating Weight	1950kg	1950kg	1950kg
A Total Length	3450mm	3450mm	3450mm
B Transportation Length	1240mm	1240mm	1240mm
D Machine Width	1150mm	1150mm	1150mm
E Machine Height	2230mm	2230mm	2230mm
Undercarriage Width			
- With Expanding Tracks	940mm – 1190mm	940mm – 1190mm	940mm – 1190mm
- With Fixed Tracks	1150mm	1150mm	-
F Minimum Ground Clearance			
G Counterweight Ground Clearance	450mm	450mm	450mm
H Tail Swing Radius	850mm	850mm	850mm
J Track Shoe Width	230mm	230mm	230mm
K Standard Bucket Width	400mm	400mm	400mm
Bucket Capacity	0.045m ³	0.045m ³	0.045m ³
RS Right Side Boom Swing	50°	50°	50°
LS Left Side Boom Swing	63°	63°	63°
Bucket Digging Force	16KN	16KN	16KN
Multi-Way Valve	Beifang	Beifang	Beifang
Rotary Motor Brand	REEWO	REEWO	REEWO
Rotation Speed	9 r/min	9 r/min	9 r/min
Climbing Angle	30°	30°	30°
Ground Pressure	30Kpa	30Kpa	30Kpa
1 Maximum Digging Height	2550mm	2550mm	2550mm
2 Maximum Dumping Height	1800mm	1800mm	1800mm
3 Maximum Digging Depth	2100mm	2100mm	2100mm
4 Maximum Digging Reach	3530mm	3530mm	3530mm
5 Minimum Swing Radius	1750mm	1750mm	1750mm
6 Max Dozer Blade Lifting	170mm	170mm	170mm
7 Max Dozer Blade Lowering	220mm	220mm	220mm

Diagram

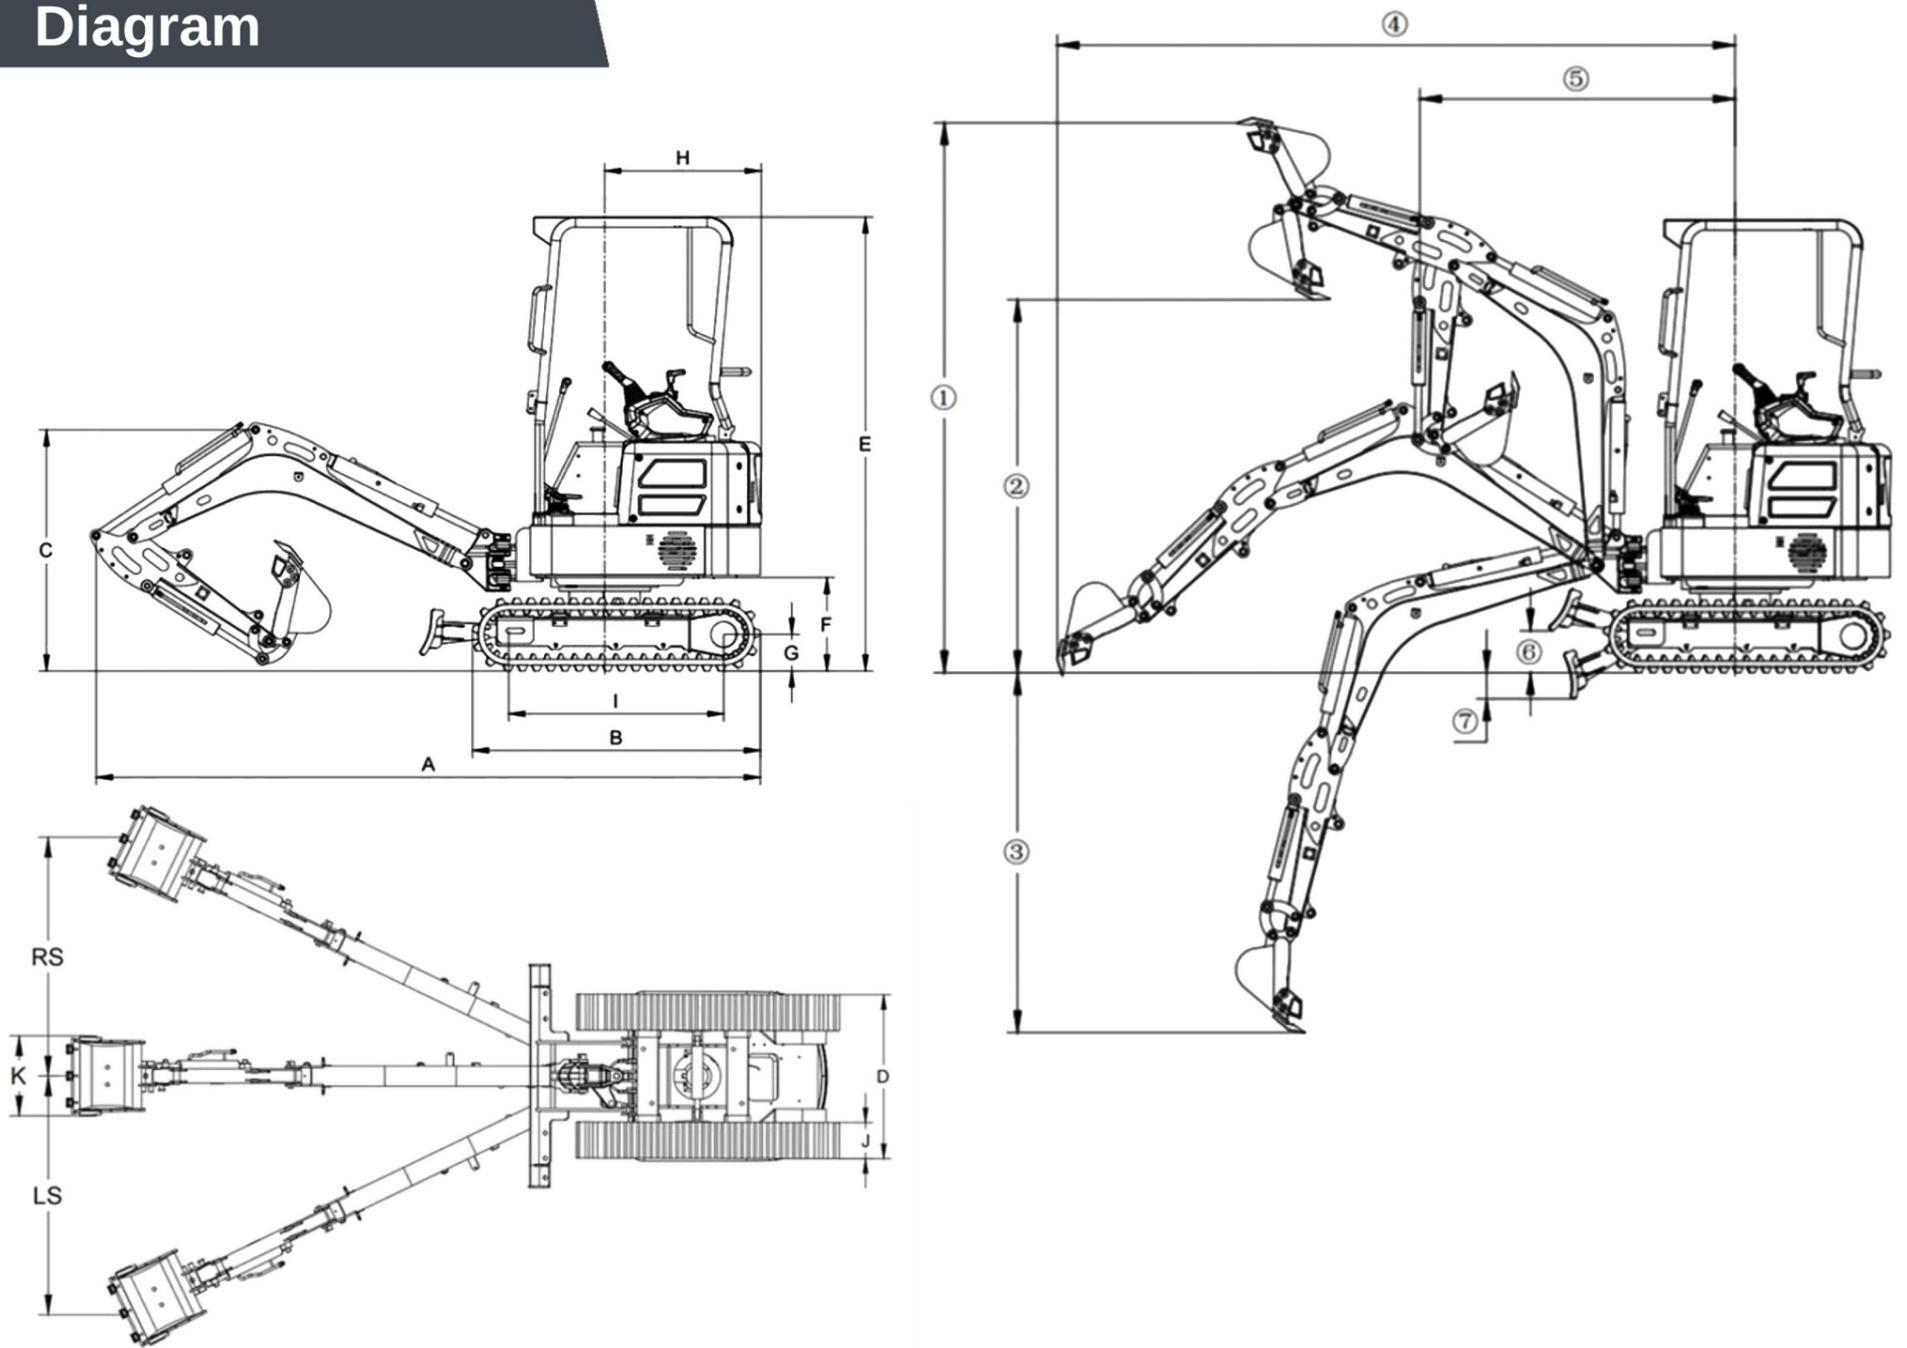

Colours



Features



- The larger 20L external diesel fuel tank allows for longer operating



- Integrated cast boom swing head stronger and more durable.



- Different assistive devices can be replaced.



- The flat platform design provides a more comfortable operating experience



- The standard 230mm tracks provide a more stable handling experience.




Rake



Auger



Grapple

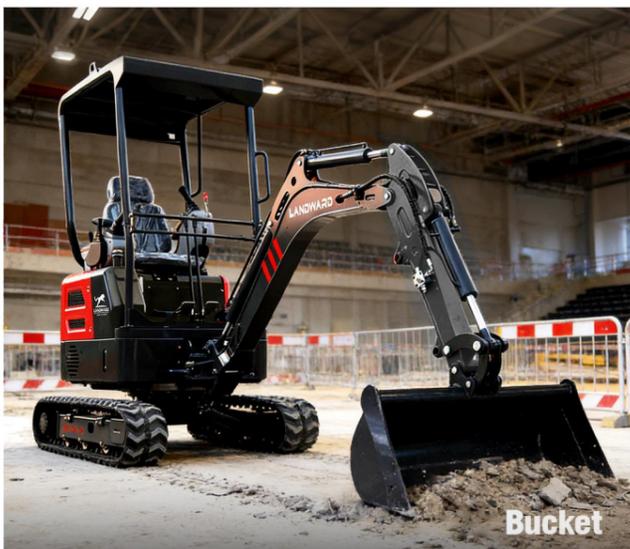

Bucket



Ripper



Break hammer