



LANDWARD

LEADING LIFE FORWARD

XT-25

2.5 Ton



Housed Track Motors
& Adjustable Tracks



Independent Boom
Swing As Standard




Easy Hydraulic
Line Connections



Hydraulic Side
Piloting Controls



Easy Rear Engine
Access & Maintenance

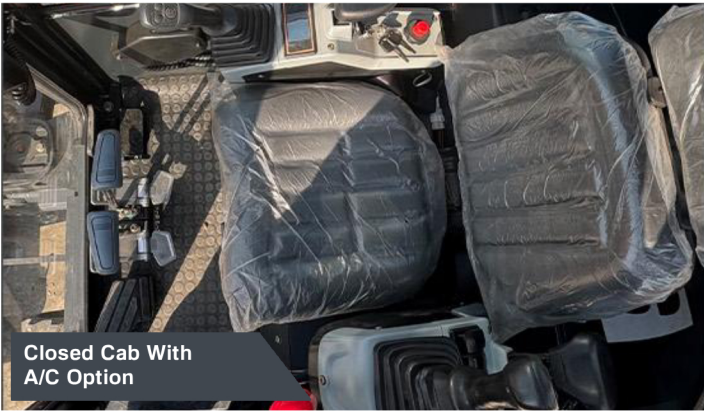

Closed Cab With
A/C Option

Specifications


XT-25

Engine	Yanmar 3TNV80F
Rated Power	24HP
Engine Cylinders	3
Cooling	Water-Cooled
Fuel Type	Diesel
Fuel Tank Capacity	20L
Hydraulic Pump	XZZ Hydraulics
Hydraulic Pump Type	Piston Pump
Hydraulic Flow Rate	70 L/min
Working Pressure	24.5 Mpa
Brand Of Travel Motor	XZZ Hydraulics
Travel Speed	2.2 - 4 kph
Operating Weight	2500kg
A Total Length	4100mm
B Track Length	1850mm
D Machine Width	1260mm
E Machine Height	2440mm
Undercarriage Width	
- With Adjustable Tracks	1315mm - 1515mm
- With Fixed Tracks	-

G	Counterweight Ground Clearance	490mm
H	Tail Swing Radius	700mm
J	Track Shoe Width	250mm
K	Standard Bucket Width	400mm
	Bucket Capacity	0.045m³
RS	Right Side Boom Swing	50°
LS	Left Side Boom Swing	63°
	Bucket Digging Force	20KN
	Multi-Way Valve	XZZ Hydraulics
	Rotary Motor Brand	XZZ Hydraulics
	Rotation Speed	9 r/min
	Climbing Angle	30°
	Ground Pressure	26.5Kpa
1	Maximum Digging Height	4190mm
2	Maximum Dumping Height	2880mm
3	Maximum Digging Depth	2410mm
4	Maximum Digging Reach	4520mm
5	Minimum Swing Radius	2130mm
6	Max Dozer Blade Lifting	260mm
7	Max Dozer Blade Lowering	300mm



Diagram

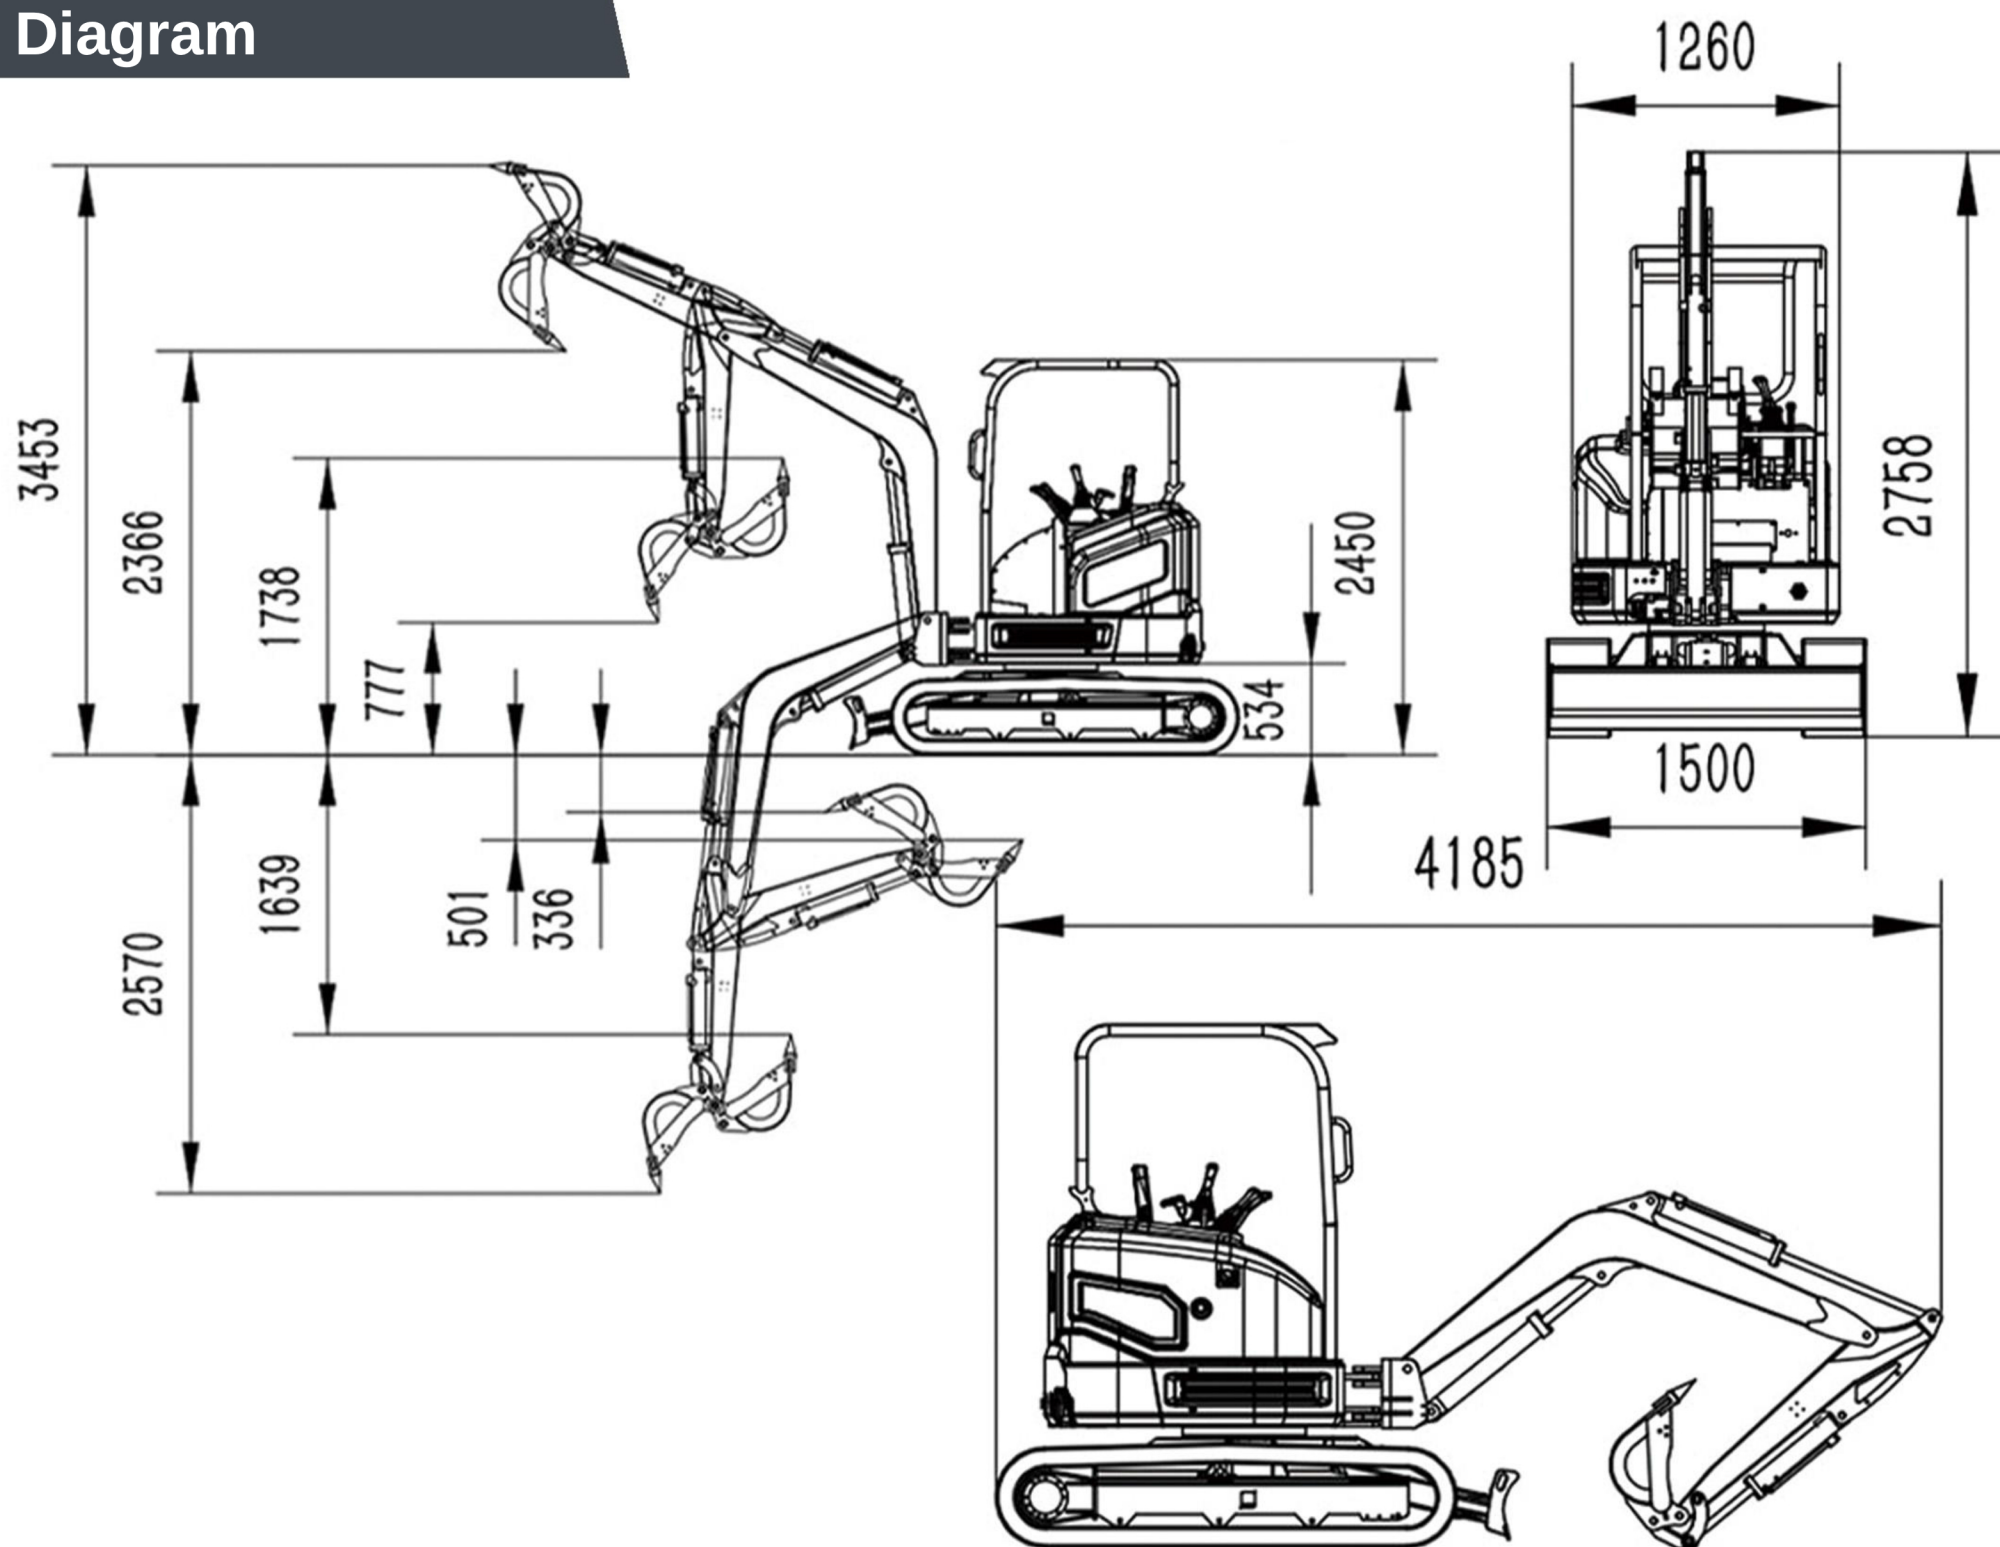

Cab Options

