



**XT15**  
COMPACT FLEXIBLE  
POWERFUL DYNAMICS



**Swing boom**


Standard side swing

Standard big arm side swing function, cast iron side swing head, beautiful and durable



**Tail can be opened**

1. Convenient inspection and maintenance
2. Three cast iron counterweights to ensure balance during work

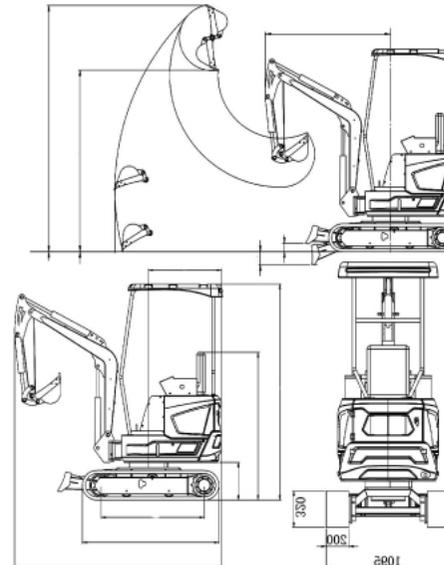

## Specifications:

Model	XT15
Operating weight	1480
Bucket capacity	0.025
Engine model	Kubota D722
Rated power (kw/r/min)	14.9kW at 3600 RPM
Hydraulic pump model	CTX63815S20R
Max. flow (L/min)	27
Working pressure (Mpa)	13.6
Control valve model	DL80-d10L-8T
Swing motor model	RMR-315
Travel motor model	6K310/4K310
Fuel tank capacity (L)	5
Hydraulic oil tank capacity (L)	17
Travel speed (km/h)	2.5
Swing speed (r/min)	9
Max. climbing degree (%)	30
A-Overall length (mm)	2320
B-Overall width (mm)	950
C-Overall height (to top of boom) (mm)	2200
D-Overall height (to top of cab) (mm)	2320
E-Counterweight ground clearance (mm)	406
F-Min. ground clearance (mm)	110
G-Tail swing radius (mm)	600
H-Track ground length (mm)	950
J-Track length (mm)	1210
K-Track gauge (mm)	560
L-Track width (mm)	930
M-Track shoe width (mm)	180
N-Turntable width (mm)	880
O-Max. digging height (mm)	2650
P-Max. dumping height (mm)	1900
Q-Max. digging height (mm)	1730
R-Max. vertical wall digging depth (mm)	1620
T-Max. digging reach (mm)	2350
U-Max. digging reach at ground level (mm)	2350
V-Min. swing radius (mm)	1610
X-Distance between center of rotation and tail length (mm)	790
Deflection angle left' /right'	46/44



**Hydraulic Joystick with armrest**

1. Hydraulic safety lock to ensure safe operation
2. Large tilt angle makes it easier to get on and off the vehicle



- The newly upgraded oil cylinder is above the boom to prevent the oil cylinder from being bumped during work, the hidden oil pipe design makes the appearance neat and beautiful.
- Both the oil pipe protective cover and the oil cylinder protective plate are made of high-strength cast steel.