

HY35

COMPACT AND POWERFUL




ENGINE Kubota D1703

Whether you're looking for exceptional value or leading innovation, there's a compact excavator that's right for you. Each model delivers impressive digging power, depth and reach, with smooth and precise controls that make it easy to deploy its leading performance and attachment versatility.



HY35 Mini Excavator-All You Need for Work in Tight Spaces.

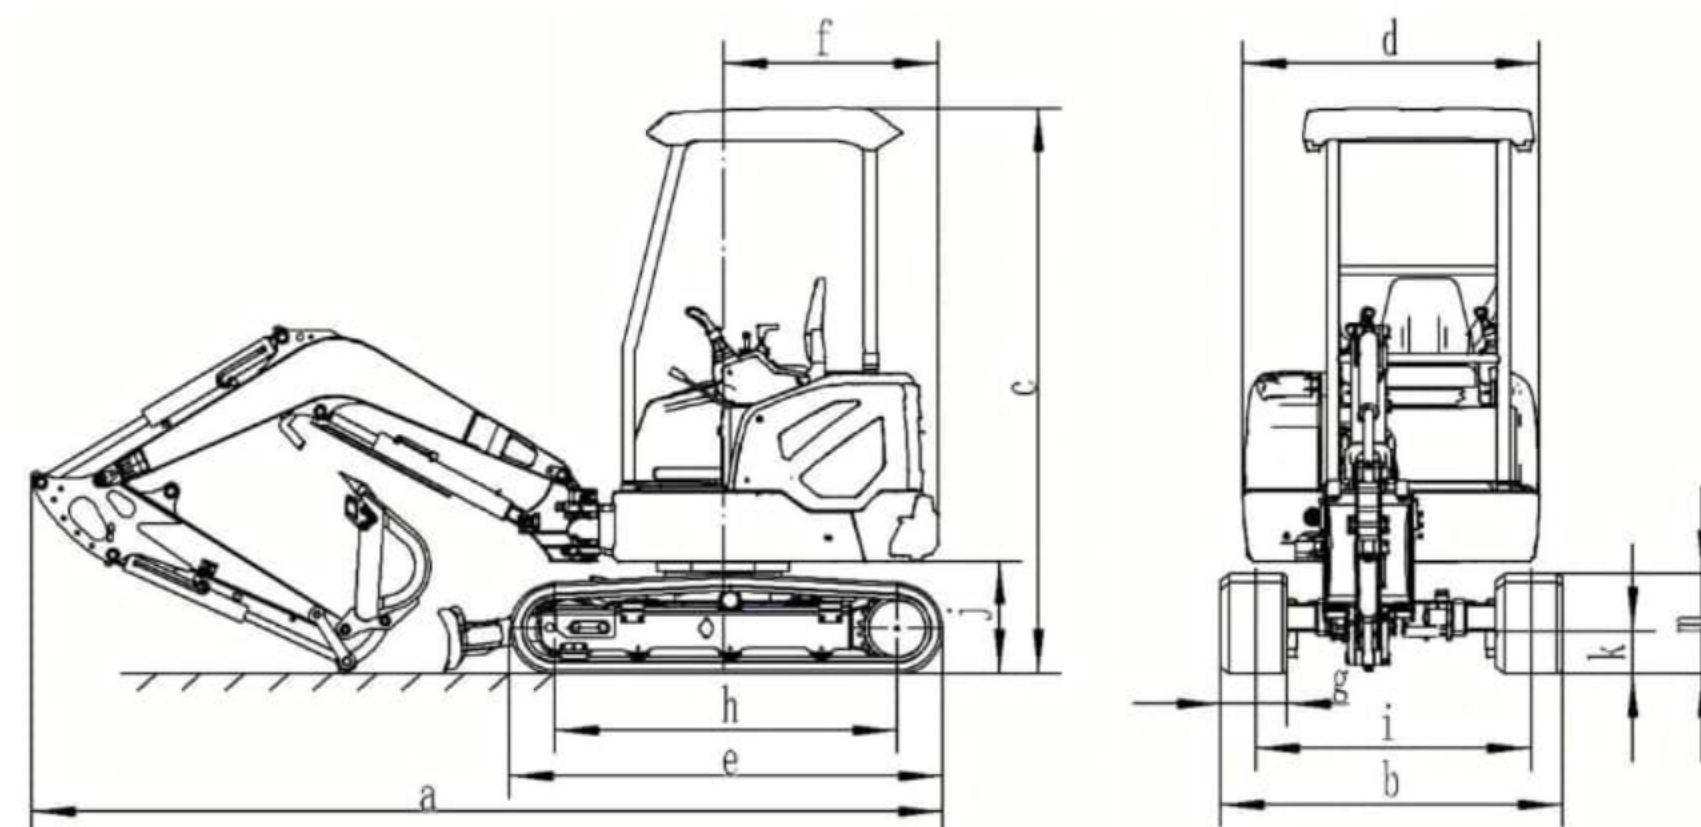

Code	Standard
a	4136mm
b	1300/1500mm
c	2570mm
d	1345mm
e	1965mm
f	975mm
g	300mm
h	1550mm
i	1000/1250mm
j	510mm
k	1950mm
m	455mm

Performance Parameters

Operating Weight	3500KG
Bucket Capacity	0.06m³

Engine

Model	KubotaD1703
Rated Output Power	18.2 kW
Maximum Torque/Speed	97.4N.m/(1550r/min)

Working Range

Maximum Digging Height	4295mm
Maximum Dumping Height	2900mm
Maximum Digging Depth	2610mm
Maximum Vertical Wall Digging Depth	1670mm
Maximum Digging Radius	4715mm
Minimum Swing Radius	1915mm
Maximum Dozer Lifting Height	255mm
Maximum Dozer Cutting Depth	280mm

Oil Capacity

Fuel Tank Capacity	38L
Hydraulic Tank Capacity	40L
Engine Oil Capacity	4.5L

Size

Overall Length	4136mm
Overall Width	1300/1500mm
Overall Height	2570mm
Width Of Platform	1345mm
Length Of Crawler	1965mm
Minimum Tail Swing Radius	975mm
Width Of Crawler	300mm
Track Gauge	1550mm
Track Gauge	1000/1250mm
Counterweight Clearance	510mm
Minimum Ground Clearance	195mm
Track Height	455mm
Boom Deflection Distance (Right)	56°/628
Boom Deflection Distance (Left)	69°/476

Speed

Travel Speed	3.2/2 km/h
Slewing Speed	8 r/min
Maximum Climbing Ability	≤30°
Maximum Tractive Force	29.5KN



DIGGER WORLD

For additional information and pricing, please visit:

WWW.DIGGER-WORLD.COM