

DX-25

2.5 TON EXCAVATOR



AVAILABLE COLOURS





WWW.DIGGER-WORLD.COM
CONTACT US FOR A QUOTE TODAY



DIGGER
WORLD

DX-25

2.5 TON EXCAVATOR

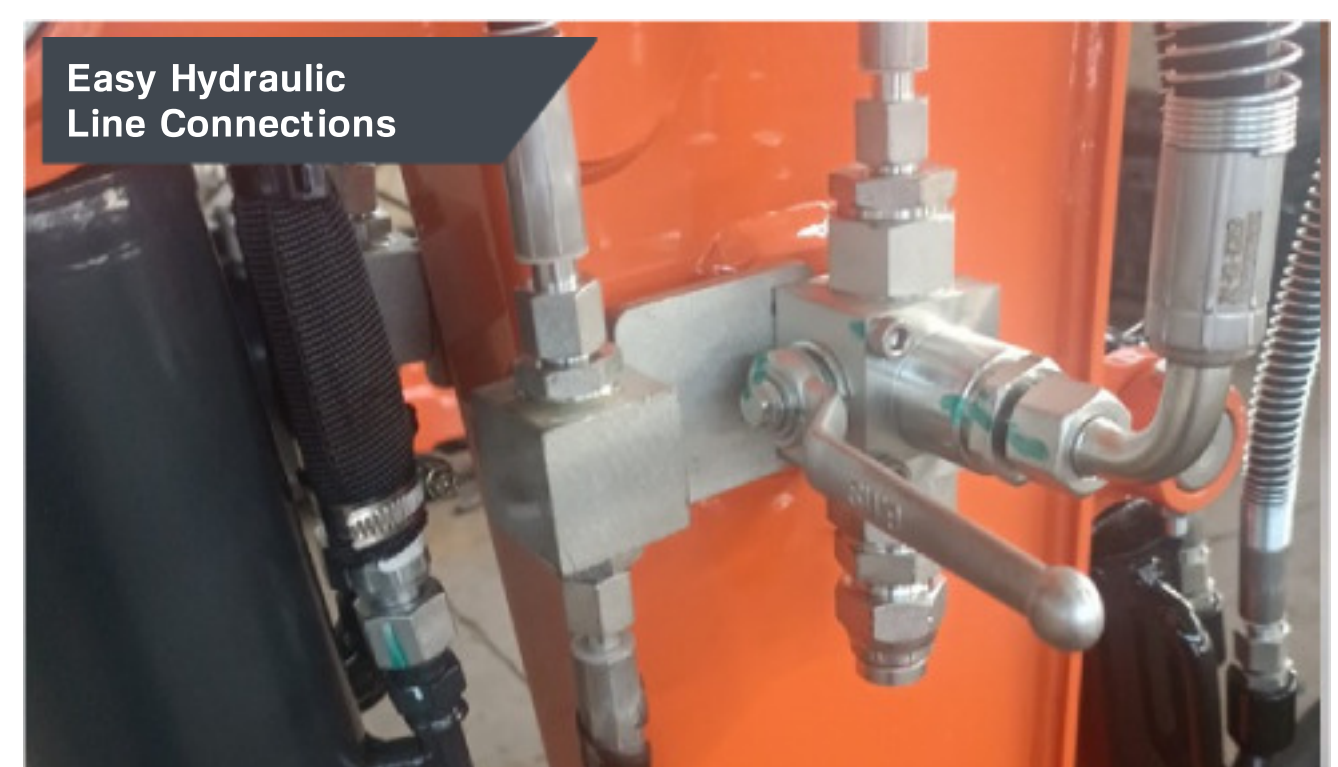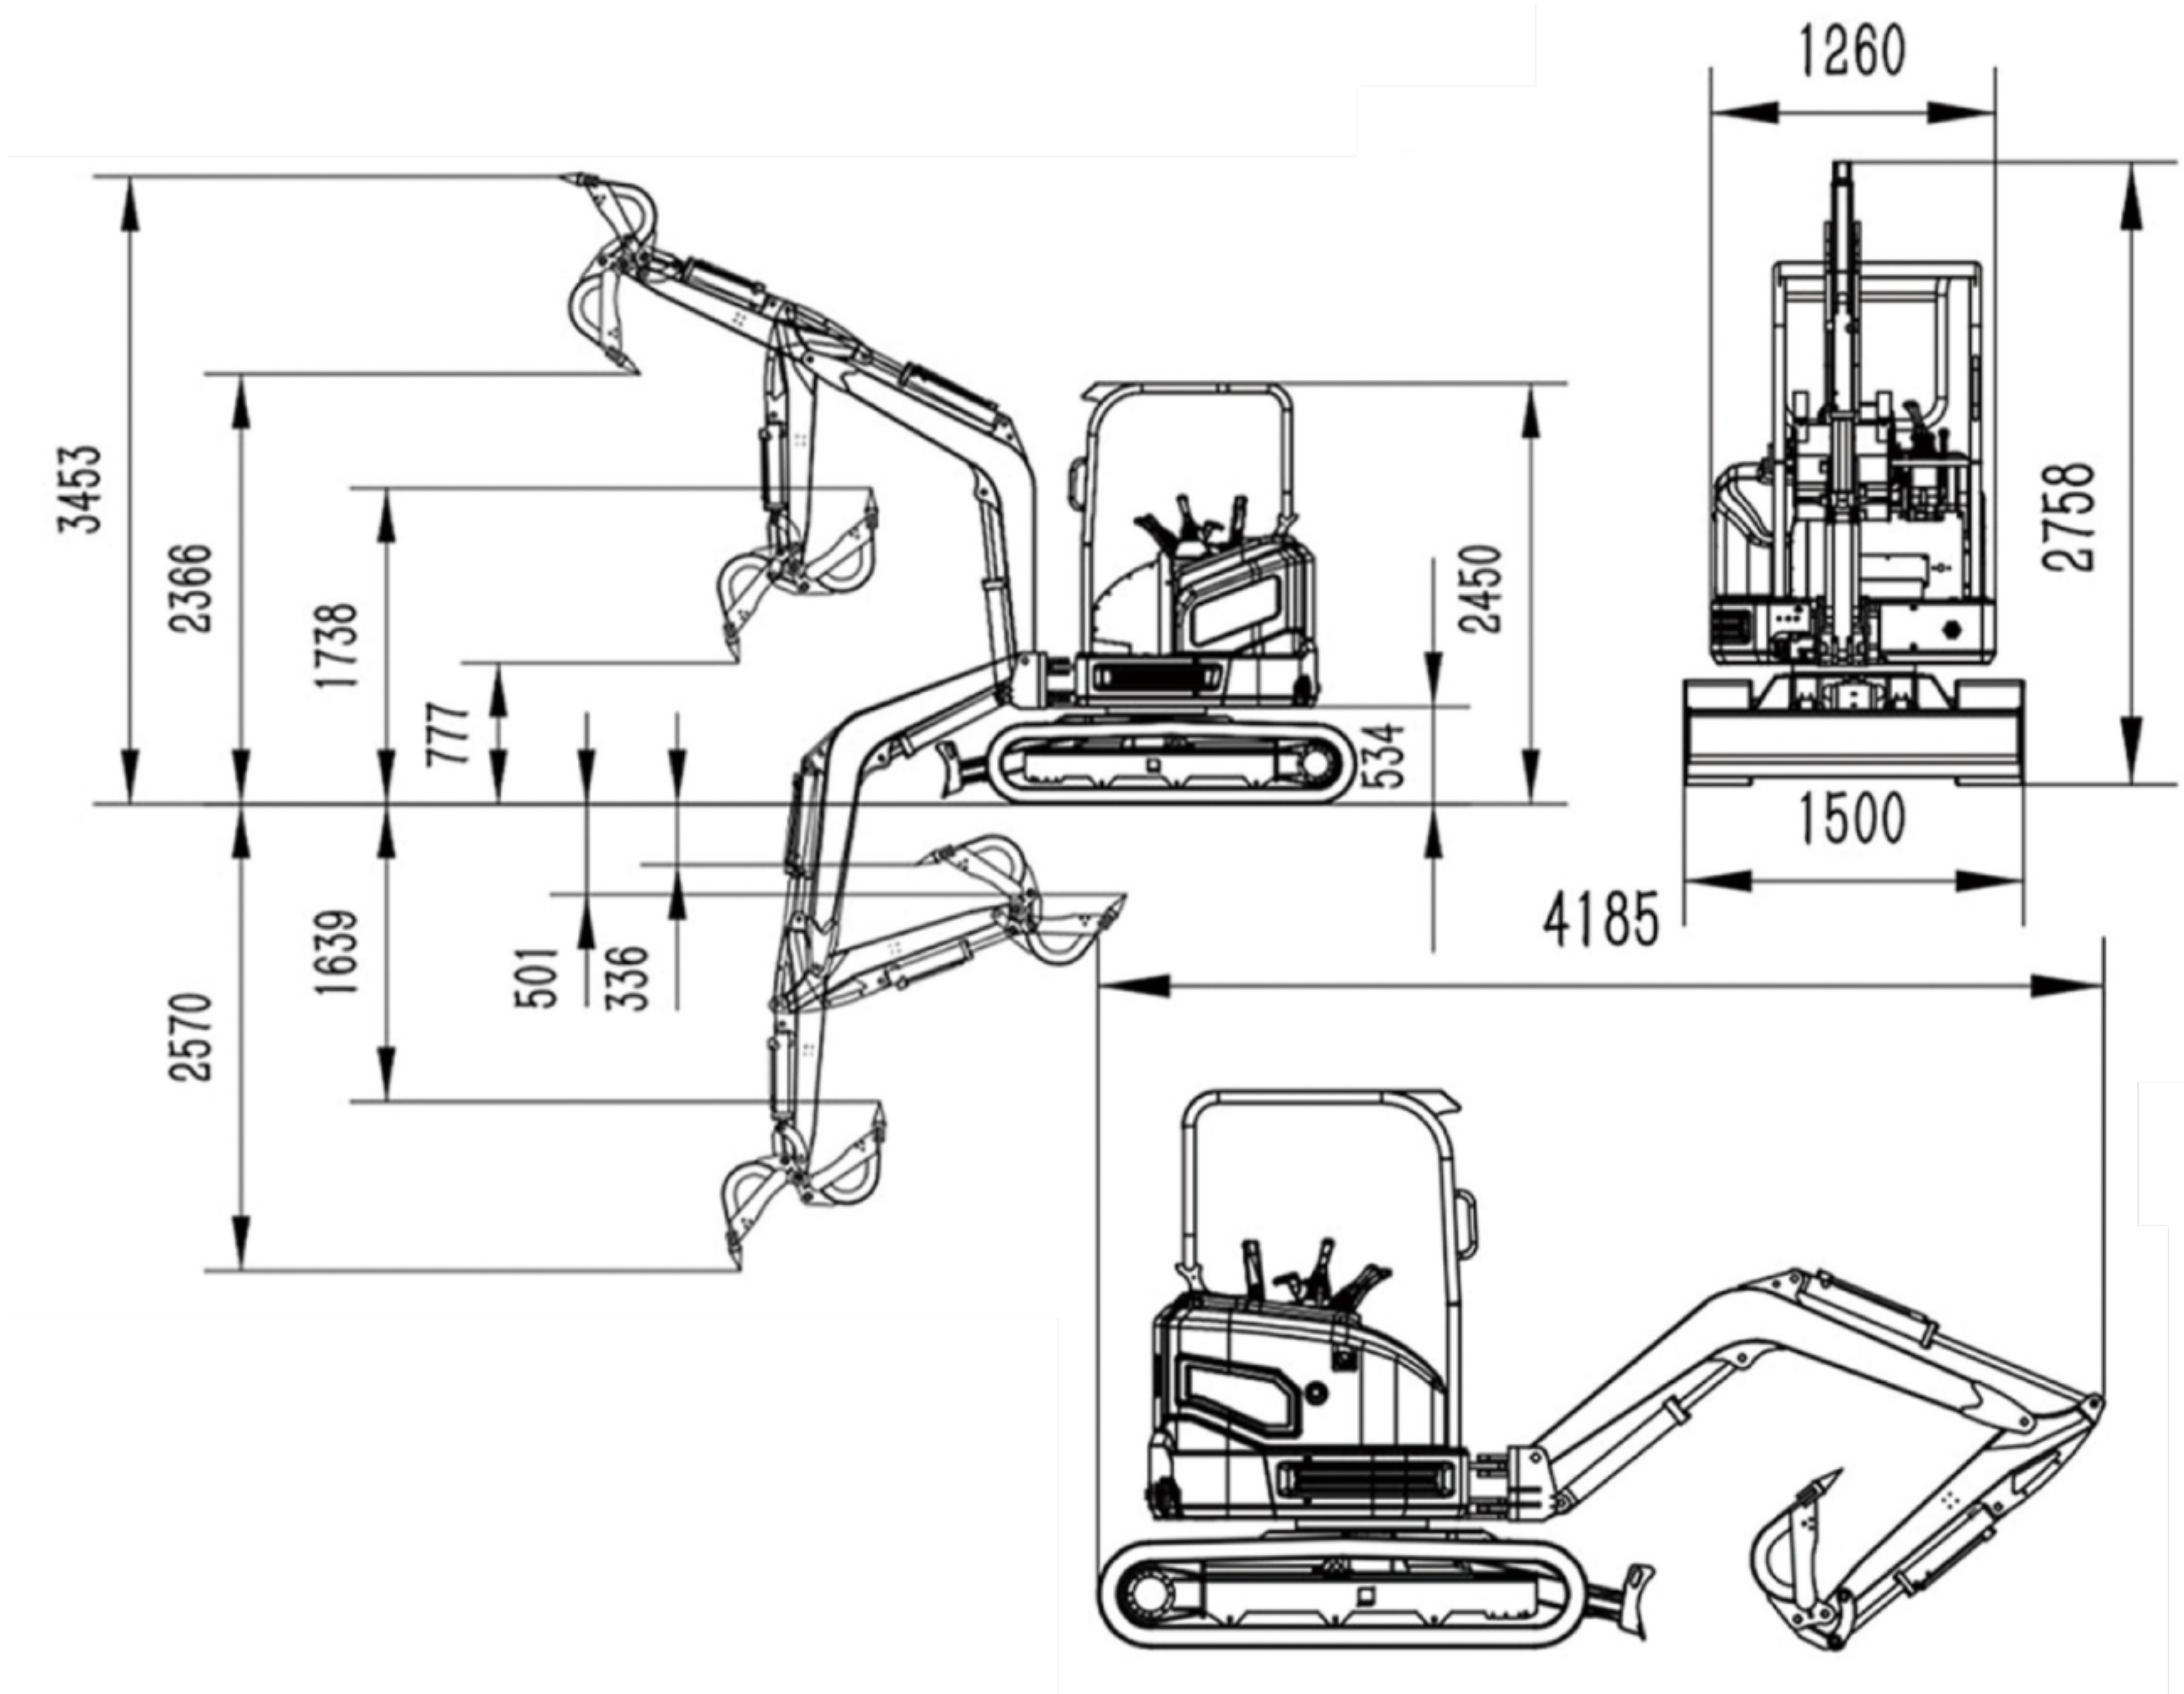

WWW.DIGGER-WORLD.COM
CONTACT US FOR A QUOTE TODAY



DIGGER WORLD

DX-25

2.5 TON EXCAVATOR

SPECIFICATIONS

Engine	Yanmar 3TNV80F	G	Counterweight Ground Clearance	490mm
Rated Power	24HP	H	Tail Swing Radius	700mm
Engine Cylinders	3	J	Track Shoe Width	250mm
Cooling	Water-Cooled	K	Standard Bucket Width	400mm
Fuel Type	Diesel		Bucket Capacity	0.045m³
Fuel Tank Capacity	20L	RS	Right Side Boom Swing	50°
Hydraulic Pump	XZZ Hydraulics	LS	Left Side Boom Swing	63°
Hydraulic Pump Type	Piston Pump		Bucket Digging Force	20KN
Hydraulic Flow Rate	70 L/min		Multi-Way Valve	XZZ Hydraulics
Working Pressure	24.5 Mpa		Rotary Motor Brand	XZZ Hydraulics
Brand Of Travel Motor	XZZ Hydraulics		Rotation Speed	9 r/min
Travel Speed	2.2 - 4 kph		Climbing Angle	30°
			Ground Pressure	26.5Kpa
Operating Weight	2500kg	1	Maximum Digging Height	4190mm
A Total Length	4100mm	2	Maximum Dumping Height	2880mm
B Track Length	1850mm	3	Maximum Digging Depth	2410mm
D Machine Width	1260mm	4	Maximum Digging Reach	4520mm
E Machine Height	2440mm	5	Minimum Swing Radius	2130mm
Undercarriage Width		6	Max Dozer Blade Lifting	260mm
- With Adjustable Tracks	1315mm - 1515mm	7	Max Dozer Blade Lowering	300mm
- With Fixed Tracks	-			



WWW.DIGGER-WORLD.COM
CONTACT US FOR A QUOTE TODAY



DIGGER
WORLD